


Specifications

Model name		KW4	KW6-M
Type		Walk-behind type	
Machine dimensions	Overall length	2140	2390
	Overall width [during operation]	1630	1930 [2280]
	Overall height	900	885
Overall weight		169	189
Engine	Model name	MZ200-B-2-A	MZ200-B-1-A
	Type	Air-cooled 4-stroke single-cylinder OHV gasoline engine	
	Total engine displacement	0.192 [192]	
	Output/rotational speed	3.7 [5.0]/3000	4.2 [5.7]/3600
	Usable fuel	Regular automobile gasoline (unleaded)	
	Fuel tank capacity	10.0	
	Ignition system	Non-contact electromagnetic ignition	
	Starter system	Recoil starter	
Movement parts	Wheel adjustment		Hydraulic system (wheel up/down)
	Wheel	Type	Thick rimmed rubber wheels
		Outer diameter	660
	Number of gears		Main shift: 2 gears for moving forwards, 1 gear for moving in reverse
Planting portion	Number of planting rows		4
	Planting row spacing		30
	Planting hill space		14 · 16 · 18 · 21 · 25 · 28*1
	Number of hills		24 · 21 · 19 · 16 · 12 · 9*1
	Planting depth		7 to 37 (5 settings)
	Hill quantity	Crossfeed distance/revolution	10.3/26, 13.4/20
		Scraping depth	7 to 17 (across 9 settings)
Planting speed		0.47 to 0.85	
Traveling on road speed		0.90 to 1.64	
Operating efficiency		0.14 to 0.26	0.20 to 0.36
Seedling conditions	Type of seedling		Seedlings in mat
	Seedling height		10 to 25
	Foliar age		2 to 4.5
Number of spare seedlings that can be loaded		3	4
Horizontal Control Mechanism for transplanting section		Horizontal Control Mechanism	Automatic Horizontal Control Mechanism (Monroe System)


These main specifications are subject to changes without prior notification for the purposes of improvement.
*1 Wheel slip ratio of 10 %

The benefits of Mechanical Rice Transplanting


- 1 Faster transplanting**
- 2 No need to find workers**
- 3 Reducing seed/ fertilizers/ pesticides/ labor cost**
- 4 Increased yield**

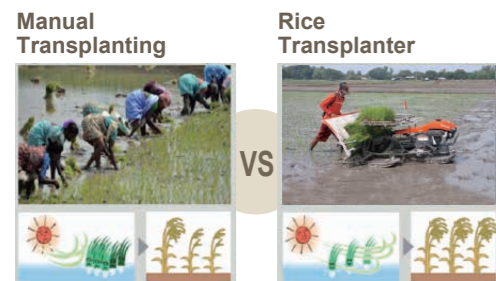

Transplanting completed in only **30 to 60 minutes per 10a [1000m²]**
A single operator is able to transplant from **1 to 2 ha a day**

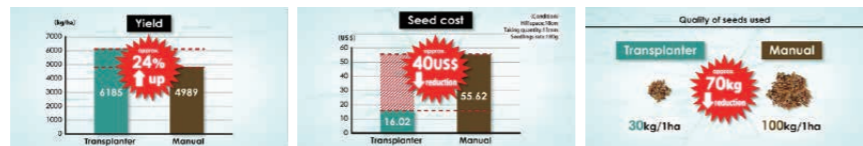

Based on Kubota's internal test result. Not guarantee the performance in any operational condition.

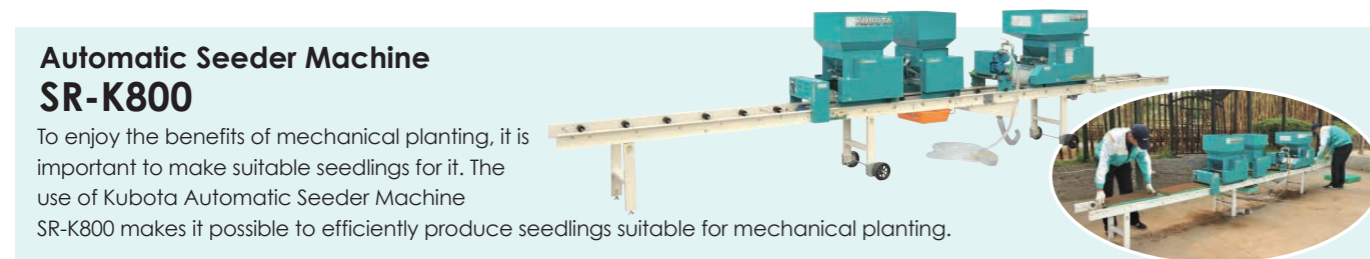

To enjoy the benefits of mechanical planting, it is important to make suitable seedlings for it. The use of Kubota Automatic Seeder Machine SR-K800 makes it possible to efficiently produce seedlings suitable for mechanical planting.



KUBOTA CORPORATION

2-47, Shikitsuhigashi 1-chome, Naniwa-ku Osaka, 556-8601 Japan
TEL: +81-(6)-6648-2193

Visit our web site at: www.kubota.co.jp/english




For Earth, For Life
Kubota

Kubota Walk-behind Rice Transplanter **KW4/KW6-M**

Simple and Easy Operation
Excellent Work Efficiency



KW4



KW6-M

Working Efficiency

NEW Powerful OHV Engine




The machine is equipped with powerful OHV gasoline engine with total displacement of 192 cc that allow effectively work at a speed of 0.85 m/s. (10% faster planting speed compared with previous model)

NEW Large Capacity Fuel Tank



The fuel tank has a large capacity of 10 L (Previous model: 4L). The reduced number of refueling contributes to its efficiency.

NEW for 4rows Spare Seedlings Slide Mechanism



The 4-row type Rice Transplanter is mounted with the same spare seedlings slide mechanism as the 6-row type. Seedling replenishment is easily done.


Performance in Muddy Field



Large Diameter Wheels


The large 660mm diameter of the wheels contributes to stable transplanting operations even in deep-tilled paddy fields. The position of the wheel can be adjusted according to the depth of the field.

Automatic Horizontal Control Mechanism (Monroe System)

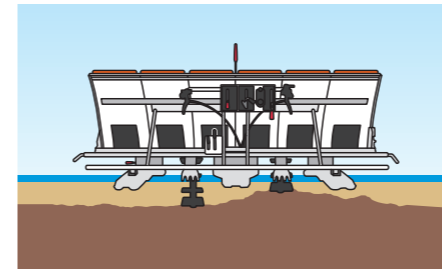

Even in undulating operation conditions, the horizontal control mechanism using hydraulic power automatically works to plant seedlings at a uniform depth.


Automatic Adjustment of Machine Height

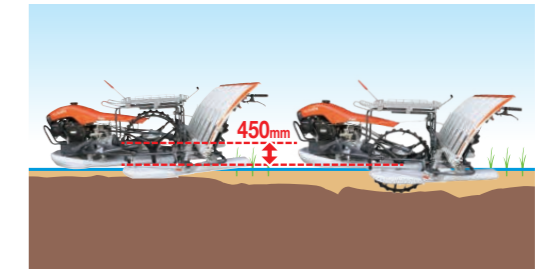

The auto sensor detects undulations to adjust the machine height up to 450mm contributing to efficient operation even in deep paddy fields.

Superior Efficiency with the New Kubota Rice Transplanter !!

NEW LED Lights

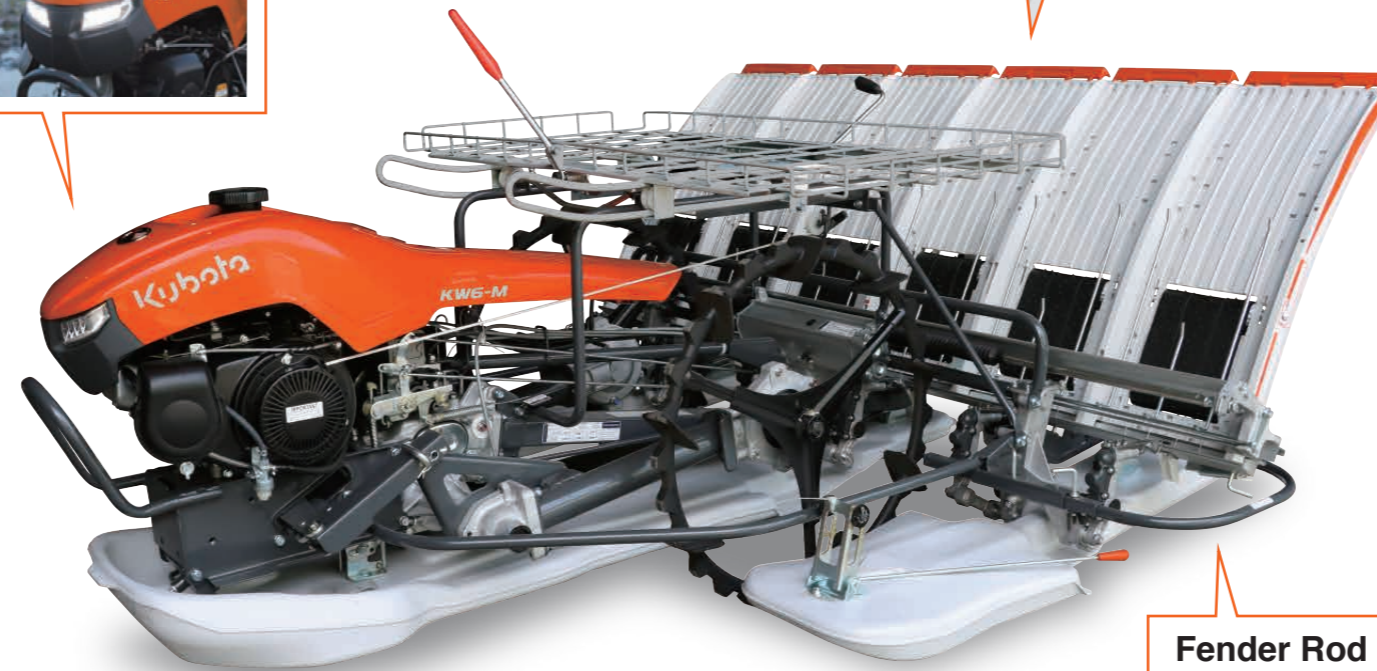


Fender Rod for Safety

Manoeuvrability

Adjustable Transplanting Settings

The distance between hills, seedling taking quantity and seedling planting depth are adjustable to fit user's needs and local conditions.

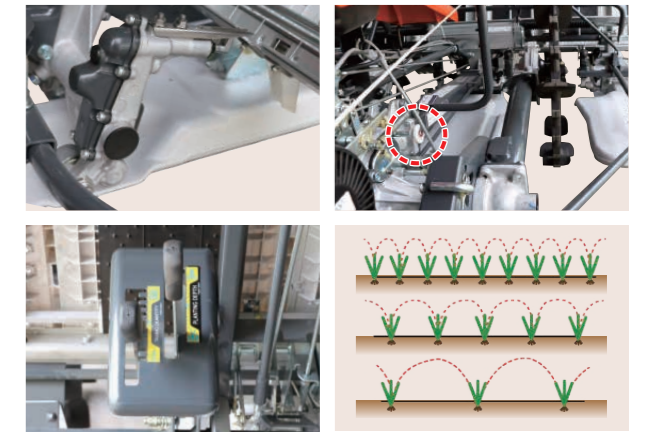

NEW for 4rows Belt Type Seedling Tray Vertical Feeding Mechanism



KW4 is equipped with belt type seedling tray vertical feeding mechanism. Planting is more stable.

Easy Maintenance

NEW One-touch Open Bonnet



The bonnet can be opened by just light pushing from above, making daily inspections and maintenance easy.

Durability

Hexagonal Axle



Durability is enhanced thanks to the hexagonal axle which prevents the axle pin from being broken.

NEW Oil Bath Method for Axle Case




The axle case has been changed from a grease method to an oil bath method to improve maintainability and durability.

Bevel-Gear Drive system



The bevel-gear drive system contributes to long operating life with no worry about chain cut.

The Use of Highly-durable Materials



Highly-durable materials are incorporated for the transmission and for hydraulic functions.